

**AUTO - Full - Easy repair**



With **AUTO-Choice**<sup>®</sup> doors we wanted to give life to a new concept of Industrial High - Speed Door: **one sole project to satisfy any requirement.**

The complete absence of metallic elements makes the curtain flexible and elastic against any kind of shock, giving to this door a self - repairing and perfect sealing properties always assuring its wind resistance.



## AUTO - Full - Easy repair

### SELF-SUPPORTING FRAME: MATERIALS AND COLOURS \*




\*RAL colours only available on galvanized steel

### CURTAIN COLOURS:



### STANDARD SIZES

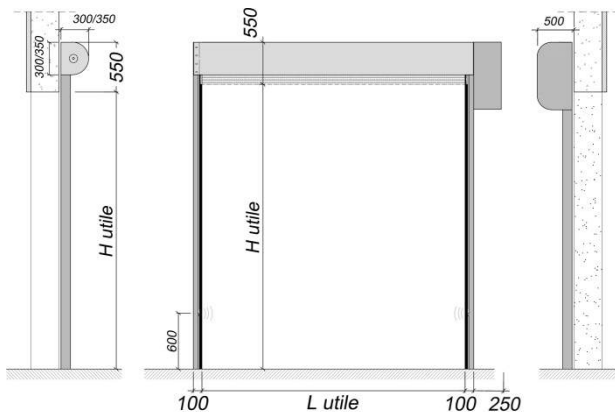

### WINDOWS

CLEAN OPENING WIDTH	N° windows
1050 - 2100	1
2110 - 4250	2
4260 - 5990	3
6000 - 7000	4

Standard window mm 700x900 in PVC Cristal.

Other sizes available upon request.

### SPECIFICATIONS

Frame	Self-supporting frame available in many materials and colours
Curtain	Double-coated PVC 1200 g/m <sup>2</sup> , self-extinguishing class II
Motor	Suitable for intensive use
Control panel	With inverter, on the motor with quick connectors
Guides	High density polizene special profiles
Speed	1,2 m/s
Safety	Safety wireless edge inside the curtain
Cover	Upper-beam and motor